

HIDE-DRANT SERIES STRAIGHT STAINLESS STEEL


SPECIFICATION:

- Sanitary Yard Hydrant- approved in Illinois, Indiana, Michigan, Ohio and Wisconsin- the most restrictive states in the United States.
 - Frost proof- when used correctly, simply turn standpipe counter-clockwise three turns to disconnect the 3/4" NPT inlet from the bottom case stainless steel stop valve and remove, then drain standpipe for freezing temperatures. No tools required to remove and reinstall standpipe.
 - Stop valve at the bottom of the Hide-Drant is automatically opened when the standpipe is reinstalled. Seals between the stainless-steel stop valve and standpipe holds water before the valve is reopened.
 - 3/4" No lead brass ball valve at outlet of the standpipe can be used in irrigation by attaching a sprinkler head to the valve.
 - 1 1/2" schedule 40 Bottom case has one way flapper drain to remove any spilled water in case, in addition to a cover over drain on outside of the case protects drain from backfill.
 - With removable riser pipe the bottom case can be capped off, allowing the grass to be mowed right over the top and it also improves appearance of landscape.
 - Ball valve included.
- Max Pressure: 80 PSI
 - Max Temperature: 120°F



MATERIAL LIST	
Part Name	Material
Bottom Case	Schedule 40 PVC
Inlet Bushing	Stainless Steel
Stop Valve	Stainless Steel
Stand Pipe	Galvanized Steel
Centering Collar	Plastic
Top Cap	Plastic
Ball Valve	No Lead Brass

DIMENSIONS				
Part No.	Bury Depth	Overall Length	Width	Weight (lbs)
HIDETSS2701	1'	22"	4"	4.3
HIDET2SS702	2'	34"	4"	5.9
HIDETSS2703	3'	46"	4"	7.5
HIDETSS2704	4'	58"	4"	9.1
HIDETSS2705	5'	70"	4"	10.7
HIDETSS2706	6'	82"	4"	12.3
HIDETSS2707	7'	94"	4"	13.9
HIDETSS2708	8'	106"	4"	12.6

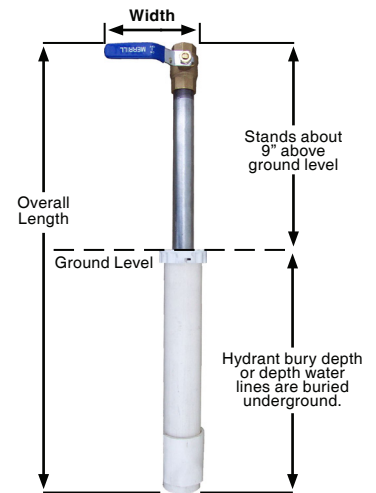

APPROVED AS A SANITARY HYDRANT

This hydrant series has been approved by the following states that require approval for sanitary hydrants, including: Illinois, Indiana, Michigan, Ohio, and Wisconsin.



315 Flindt Dr. | Storm Lake, Iowa 50588 | (800) 831-6962

Learn More at merrillmfg.com

