

C-1000 SERIES NO-LEAD STAINLESS STEEL

SPECIFICATION:

- All-Weather Powder Coat Finish on head casting and lever provides resistance to corrosion, UV and abrasion.
- Heavy-duty, thick-walled head casting with bucket hook and removable 3/4" No-Lead Hose Thread Adapter
- Unique lever control to provide variable flow, rather than using a manual "lock", that could rust, to set the flow. Easy to grip, heavy duty handle.
- Stainless steel operating stem is polished, which will not cut the Teflon™ packing and packing nut, resulting in longest operating life.
- Pivot connector and nuts replaces set screws, that tend to be unreliable. This results in years of easy reliable adjustments.
- Draw Straps are made of high-strength 1040 hot-rolled steel that reduces wear and eliminates side pull on the operating rod, resulting in longer life.
- 1" stainless steel standpipe where there are no exposed threads on the pipe where it meets the valve body. The threads are coated with bitumastic to prevent rusting underground and extending the life of the hydrant.
- Heavy-duty, thick-walled stainless steel valve body, making it strong and resistant to breakage. Dual bypass design results in high flow rate in. There is an 1/8" FPT tapped drain hole that allows the water in the standpipe to self-drain when hydrant is turned off, making the head and standpipe frost proof in even the coldest of weather.
- 3/8-16UNC Stainless steel operating rod
- Self-lubricating plunger prevents rubber from bonding to the valve body, with the longest operating life in a one-piece design.



Certified to NSF/ANSI/CAN 372




- Max Pressure: 100 PSI
- Max Temperature: 120°F

CERTIFICATION:

- NSF/ANSI/CAN 372 Certified
- ASTM A312 Sch 40 StandPipe

| MATERIAL LIST | |
|------------------------|------------------------------------|
| Part Name | Material |
| Head | Cast Iron |
| Handle | Cast Iron |
| Lever Bolt & Nut | Zinc Plated Steel |
| Draw Straps | 1040 Rolled Steel |
| Pivot Connector & Nuts | Zinc Plated Steel |
| Packing Nut | Brass |
| Valve Stem Packing | Teflon |
| O-Ring | Buna |
| Valve Body | Stainless Steel |
| Operating Stem | Stainless Steel |
| Rod Reducer | Brass |
| Operating Rod | Stainless Steel |
| Stand Pipe | ASTM A312 Sch 40 Stainless Steel |
| Plunger | Brass and Proprietary Rubber Blend |

| DIMENSIONS | | | | |
|------------|------------|----------------|-------|--------------|
| Part No. | Bury Depth | Overall Length | Width | Weight (lbs) |
| CSS7501 | 1' | 44.5" | 8.25" | 12 |
| CSS75015 | 1-1/2' | 50.5" | 8.25" | 13.1 |
| CSS7502 | 2' | 56.5" | 8.25" | 14.3 |
| CSS7503 | 3' | 68.5" | 8.25" | 16.7 |
| CSS7504 | 4' | 80.5" | 8.25" | 19 |
| CSS7505 | 5' | 92.5" | 8.25" | 21.3 |
| CSS7506 | 6' | 104.5" | 8.25" | 23.7 |
| CSS7507 | 7' | 116.5" | 8.25" | 26 |
| CSS7508 | 8' | 128.5" | 8.25" | 28.3 |
| CSS7510 | 10' | 152.5" | 8.25" | 33 |

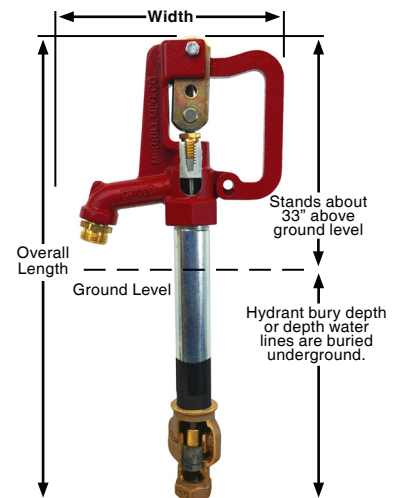

315 Flindt Dr. | Storm Lake, Iowa 50588 | (800) 831-6962

Learn More at merrillmfg.com

